


## Sensor-switched outdoor light

# L 1

white

EAN 4007841 650513



max.60w



infrared sensor  
180°



max. 10 m



IP44



90° vertical



2 - 2000 lux



8 sec - 35 min



shock proof IK07



ideal 2 m



energy saving

### Function description

Practical design. Practical sensor-switched outdoor light L 1, ideal for building entrances and building fronts, 180° angle of coverage, reach up to 10 m, selectable time and twilight threshold, includes sheet of house numbers.

### Technical specifications

Dimensions (L x W x H)	255 x 110 x 120 mm
Mains power supply	230 V / 50 Hz
Mounting height max.	3,00 m
Sensor Technology	passive infrared
Output	60 W
Interconnection	No
With lamp	No
Lamp	All-purpose lamp
Base	E27
With motion detector	Yes
Detection angle	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 3 m (14 m²)

Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	8 s – 35 Min.
Basic light level function	No
Soft light start	No
Impact resistance	IK07
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Manufacturer's Warranty	3 years
includes sheet of self-adhesive numbers	Yes
Settings via	Potentiometers
Version	white
PU1, EAN	4007841650513

Sensor-switched outdoor light


# L 1

white

EAN 4007841 650513

**STEINEL®**  
Intelligent technology

## Detection Zone

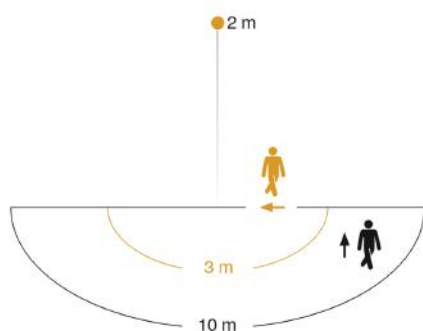

Mögliche Montagehöhe: 1,80 m – 3,00 m

Orange: radial

Schwarz: tangential

## Dimension Drawing

