



AHELED/OB



Features

All polycarbonate oval bulkhead for external applications.

Only suitable for semi commercial applications

fast loop-in / loop-out connections.

CCT selectable between 3000K, 4000K and 6500K.

Comparable performance to 28W TC-DD.

Body options of black or white.

Polycarbonate opal diffuser.

LED lifespan L70 54,000 hours.

Non-dimmable.

General Information


Lamp Type	LED
Colour / Finish	Black
IP Rating	IP54
IK Rating	IK09
Class Protection	2
Internal / External	External
Surface / Recessed / Suspended	Surface
Warranty (Years)	2
CE Mark	Yes
Length (mm)	212
Width (mm)	119
Depth (mm)	60.5

Technical Information

Wattage	12W
Lumens Delivered	1082lm (3000K), 1105lm (4000K), 1137lm (6500K)
Lm/W	93lm (3000K), 96lm (4000K), 97lm (6500K)
CRI	Ra 80
CCT	3000/4000/6500K
Input	220-240V
Hertz	50/60Hz
Operating Temp	-5°C to 25°C

Technical Data - ETIM - Ceiling-/wall luminaire (EC002892)

Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	No
Suitable for surface mounting	Yes
With light source	Yes
Suitable for number of lamps	1
Material housing	Plastic
Colour housing	Black
Nominal voltage	220-240 V
Control gear included	Yes
No dim function	Yes
Degree of protection (IP)	IP54
Impact strength	IK09
Protection class	II
Suitable for emergency lighting	No
With movement sensor	No
With light sensor	No
Max. system power	12 W
Colour of light	White
Colour temperature	3000-6500 K
Colour rendering index CRI	80-89
Width	119 mm
Height/depth	60.5 mm
Length	212 mm

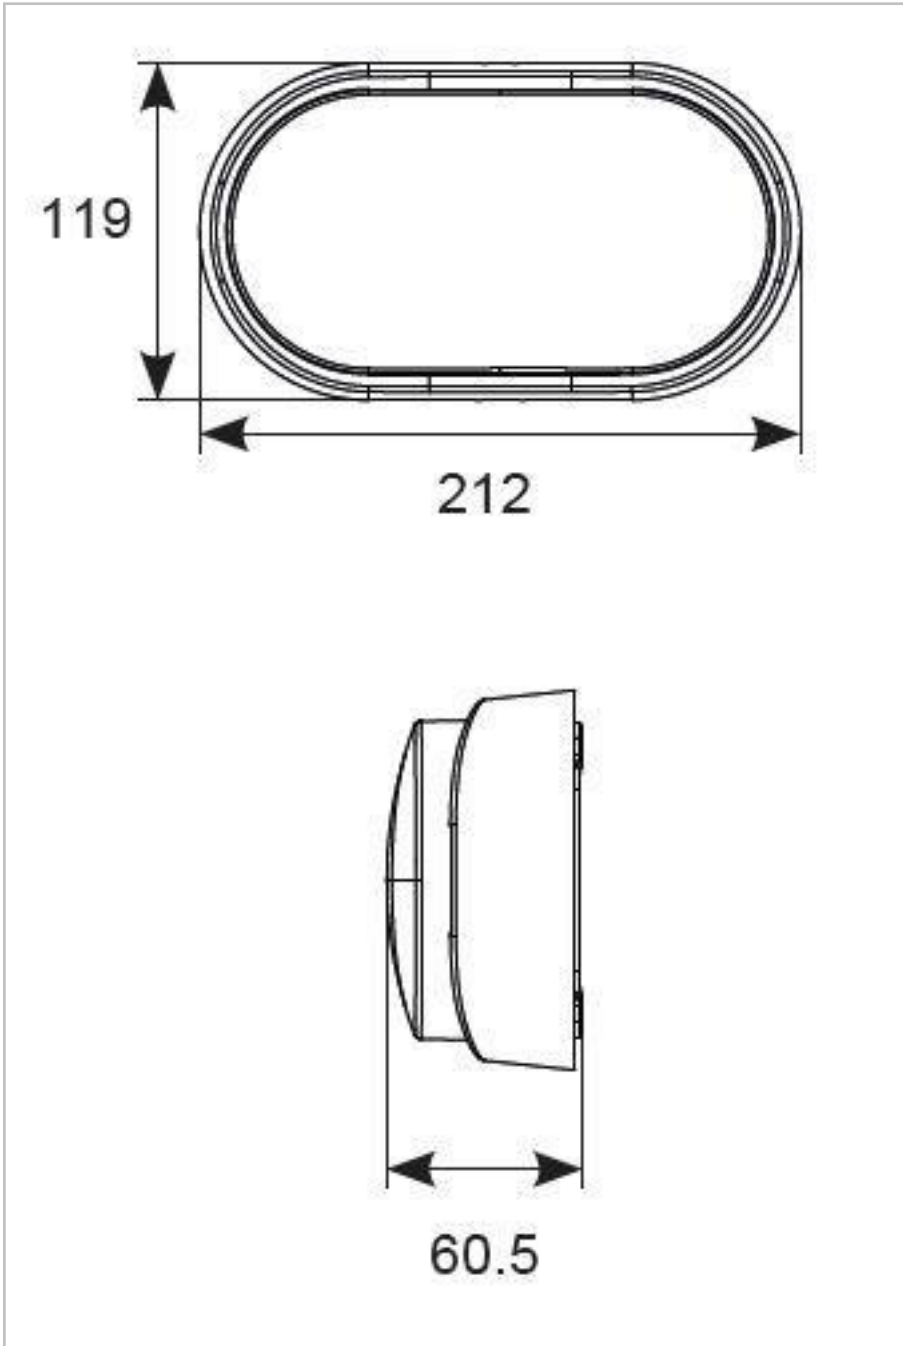

Datasheet generated from <https://onetimepim.com> last updated Friday, February 18, 2022 12:22:19 PM