

Download
IES File from
website

Robustly constructed & suitable for multiple commercial use where performance and functionality are required.

PERFECT FOR MULTI-PURPOSE
COMMERCIAL APPLICATIONS


CATALOGUE RANGE: ■ Ceiling/Wall/Bulkheads



EternaPro
LED
5 YEAR
Warranty*



30W INTEGRATED LED BULKHEAD

- Captive stainless steel screws
- 20mm knockouts side and rear
- **WPACKLEDPC**: photocell for dusk to dawn operation
- Tough polycarbonate housing



• M.O.M: 1 / O.P.Q: 4

| Code | Version | Colour | Wattage | Colour Temp. | Lumens | Avg. Rated Life (Hrs) | IP Rating |
|------------|-----------|--------|---------|--------------|---------|-----------------------|-----------|
| WPACKLED | Standard | Black | 30W | 4200K | 2000 lm | 30,000 hrs | IP65 |
| WPACKLEDPC | Photocell | | | | | | |

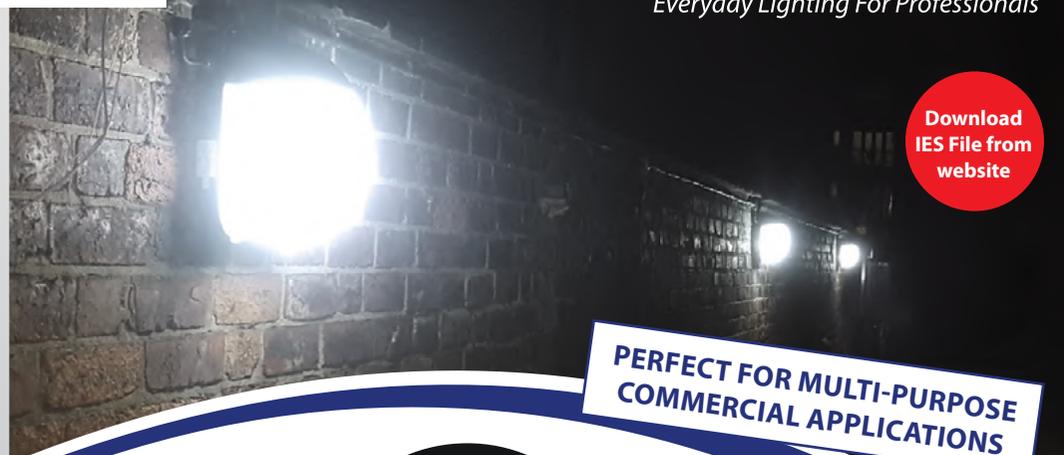

| LED LAMP SPECIFICATIONS: | |
|--|-------------------------------|
| Lumens total flux | 2000 lm |
| Rated Wattage | 30W |
| Rated luminous flux | 2000 lm |
| Nominal life time of the lamp | 30,000 hrs |
| Colour temperature | 4200K |
| Number of switching cycles before premature lamp failure | ≥15,000 |
| Warm-up time up to 60 % of the full light output | Instant full light |
| Dimmable | No |
| LED array dimensions (W/H) | 198 x 167mm |
| Nominal beam angle | 120° |
| Rated power | 30W |
| Rated lamp lifetime | 30,000 hrs |
| Lamp power factor | >0.9 |
| Lumen maintenance factor at end of nominal life | ≥0.70 |
| Starting time | <0.1s |
| Colour rendering | ≥80 |
| Colour consistency | Within 6 step Macadam ellipse |
| Rated peak intensity | 720cd |
| Rated beam angle | 120° |
| Voltage | 220/240V |
| Not suitable for accent lighting | |

*Subject to terms & conditions