

Sensor-switched LED floodlight

# LS 300 LED

white

EAN 4007841 067588

Article number 067588



LED

30 years (Ø 4,5h / day)

4000 K

4000K neutral white



infrared sensor 240°



max. 12 m



IP44



2 - 1000 lux



10 sec - 15 min



energy saving

3 years

manufacture's warranty  
steinel.de/garantie3y



CE

## Function description

Extremely bright, robust and vigilant: the LS 300 LED sensor-switched floodlight. On-demand light for illuminating large areas around buildings. Infrared sensor with 240° angle of coverage and 12 m reach. Light output 2962 lm, colour temperature 4000 K, power consumption 29,5 W. Robust aluminium floodlight head. Available in black or white.

# LS 300 LED


white  
 EAN 4007841 067588  
 Article number 067588

## Technical specifications

Dimensions (L x W x H)	186 x 213 x 241 mm
With lamp	Yes, STEINEL LED system
With motion detector	Yes
Manufacturer's Warranty	3 years
Settings via	Potentiometers
Version	white
PU1, EAN	4007841067588
Application, place	Outdoors
Application, room	outdoors, all round the building, courtyard & driveway
Colour	white
Includes corner wall mount	No
Installation site	wall
Installation	Wall, Surface wiring
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	-10 – 30 °C
Housing material	Aluminium
Cover material	Glass transparent
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	25 - 50 W
Power consumption	30,4 W
Mounting height max.	4,00 m

Angle of aperture	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 3.5 m (26 m <sup>2</sup> )
Reach, tangential	r = 12 m (302 m <sup>2</sup> )
Photo-cell controller	Yes
Luminous flux total product	2704 lm
Measured luminous flux (360°)	2962 lm
Total product efficiency	92 lm/W
Colour temperature	4000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L70B10
LED cooling system	Passive Thermo Control
Soft light start	No
Twilight setting	2 – 1000 lx
Time setting	10 s – 15 Min.
Basic light level function	No
Interconnection	No

## Detection Zone

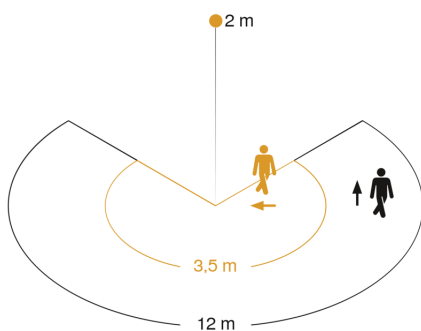

Mögliche Montagehöhe: 1,80 m – 4,00 m  
 Orange: radial  
 Schwarz: tangential

## Dimension Drawing

