

Sensor-switched outdoor light

L 15

white
EAN 4007841 617912



max.60w
 infrared sensor 180°
 max. 10 m
 IP44
 90° vertical
 2 - 2000 lux
 8 sec - 35 min
 ideal 2 m
 energy saving
 3 JAHRE HERSTELLER GARANTIE steinel.de/garantie

max. 60 W E27
infrared sensor 180°
max. 10 m
IP44
90° vertical
2 - 2000 lux
8 sec - 35 min
ideal 2 m
energy saving
manufacturer's warranty steinel.de/garantie

Function description

The good old days. Classic outdoor SensorLight L 15, ideal for building fronts and entrances, 180° angle of coverage, reach up to 10 m, selectable time and twilight threshold, sensor tilts through 90° for exact adjustment of the detection zone.

Technical specifications

| | |
|-----------------------------------------------|---------------------|
| Dimensions (L x W x H) | 243 x 188 x 410 mm |
| Mains power supply | 230 – 240 V / 50 Hz |
| Mounting height max. | 3,00 m |
| Sensor Technology | passive infrared |
| Output | 60 W |
| Interconnection | No |
| With lamp | No |
| Lamp | All-purpose lamp |
| Base | E27 |
| With motion detector | Yes |
| Detection angle | 180 ° |
| Sneak-by guard | Yes |
| Capability of masking out individual segments | Yes |
| Electronic scalability | No |
| Mechanical scalability | No |

| | |
|-------------------------|----------------------|
| Reach, radial | r = 3 m (14 m²) |
| Photo-cell controller | Yes |
| Twilight setting | 2 – 2000 lx |
| Time setting | 8 s – 35 Min. |
| Impact resistance | IK03 |
| IP-rating | IP44 |
| Protection class | II |
| Ambient temperature | -20 – 40 °C |
| Housing material | Plastic |
| Cover material | Plastic, transparent |
| Manufacturer's Warranty | 3 years |
| Settings via | Potentiometers |
| Version | white |
| PU1, EAN | 4007841617912 |

Sensor-switched outdoor light


L 15

white

EAN 4007841 617912

STEINEL[®]
Intelligent technology

Detection Zone

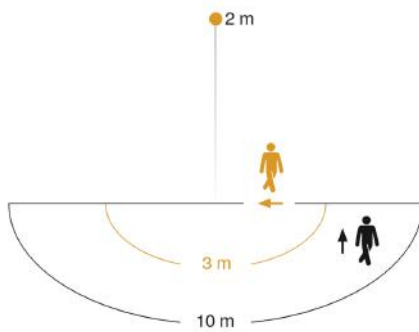

Mögliche Montagehöhe: 1,80 m – 3,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

