
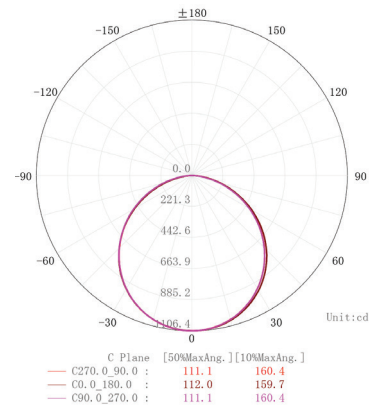
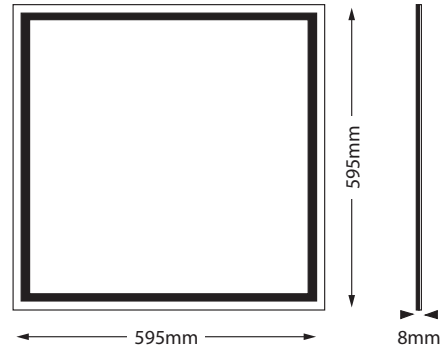


## Elsa 26W 600x600 Datasheet

4000K 3000Lm Recessed LED Panel

PX665Y4KY

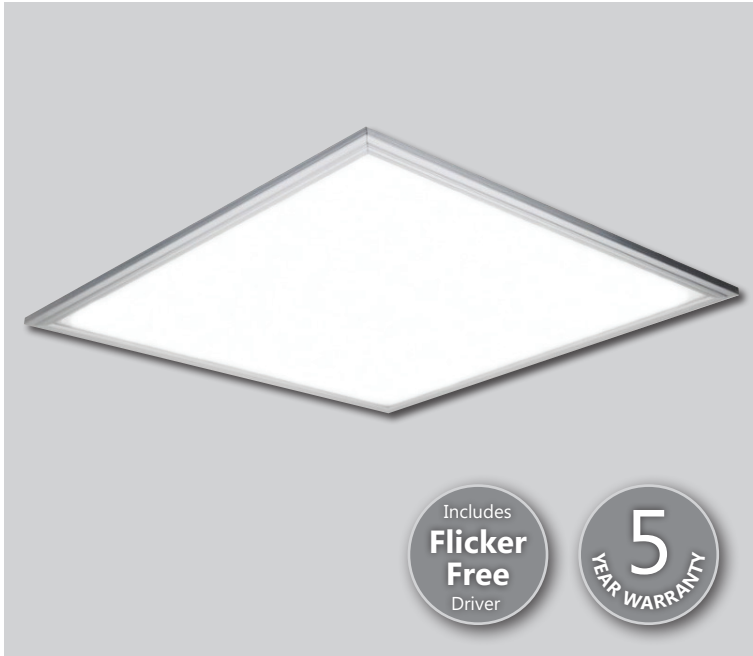

<b>Dimensions (mm)</b>	595*595
<b>Weight (kg)</b>	2.1
<b>Material</b>	Aluminium & PC
<b>Colour/Finish</b>	White
<b>IK Rating</b>	04
<b>Voltage/Frequency</b>	220-240V 50/60Hz
<b>Luminous Flux</b>	3000lm
<b>Luminous Efficacy</b>	115lm/w
<b>Color Rendering Index</b>	80
<b>CCT Colour Temp</b>	4000K
<b>SDCM Colour Consistency</b>	<6
<b>UGR Unified Glare Rating</b>	UGR<21
<b>LEDs</b>	180pcs
<b>Light Control</b>	On/Off
<b>Beam Angle</b>	120°
<b>Adjustable</b>	No
<b>Chip</b>	4014
<b>IP Rating</b>	20
<b>Maintained Luminous Flux</b>	(L80B10) 50,000h
<b>Warranty</b>	5 years

## Features & Applications

The Prelux Elsa 26W 600 x 600 Edge-light LED panel is a white LED based edge lighting product designed with high quality LGP (light guide plate) for illumination applications. It has many advantages over traditional fluorescent tube fixtures with its features of soft and uniform brightness, energy efficiency, thinner frame, long lifetime and is also maintenance-free.

### Ideal Application Areas Include:

Schools/Colleges, Office Developments, Retail Premises, Hotels and Leisure Facilities, Hospitals and Public Buildings.

Options Available	
<b>Light Controls</b>	Casambi *CM / Dali *D
<b>Drivers</b>	Dali PXDADRY / Triac PXTRDRY
<b>3 Hr Emergency</b>	PXEMPACK
<b>Surface Kit</b>	PXSURFKIT600Y
<b>Wire Suspension Kit</b>	PXWIREY