
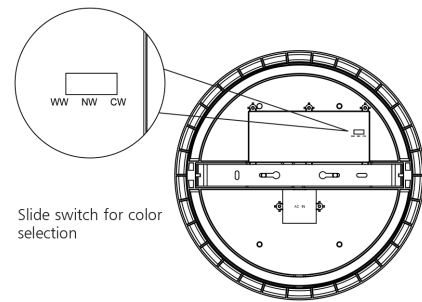



Othello CCT Dimmable Datasheet

30W 2800-3840Lm LED Bulkhead / Ceiling Light

PXOTH30CCTD

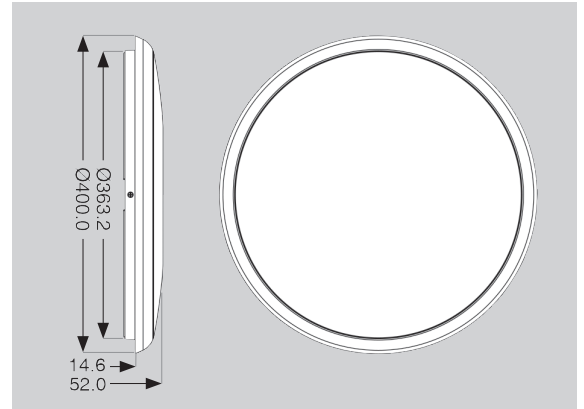

Slide switch for color selection



Dimensions	Ø400*52mm
Input Voltage	200~240V 50Hz
Input Power	30W
Power Factor	≥0.9
Beam Angle	120°
Efficiency	≥88%
Housing Color	White
Luminous Flux	2800Lm (WW), 3480lm (CW), 3000Lm (DL)
Color Rendering Index	>80
Lifetime	40,000Hrs
CCT	3000K / 4000K / 5700K
Protection Level	IP54
Storage Temperature	-20°C~+65°C
Working Temperature	-20°C~+45°C
Dimmable	Triac Dimming
Dimming Range	8-100%
Certification	CE, RoHS, SAA
Warranty	3 Years

Features & Applications

The Othello CCT comes with the ability to choose either warm, cool or daylight colour temperatures by sliding a switch on installation of the product.

The IP54 protection rating also makes it suitable for a wider range of applications, including stairwells, corridors and toilet facilities.

The slim design and superior quality finish also makes the Othello CCT range a superb choice when aesthetics are a consideration.