


## **Technical Specification**





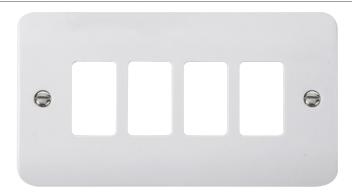

## **General Information**

Plate Dimensions (mm)  $146 \text{ (W)} \times 86 \text{ (H)} \times 9 \text{ (D)}$ 

Plate Fixing Centres - Horizontal (mm) 120.6

Style Mode

Finish Polar White

Materials Front Plate: Urea

Anti Microbial Certified Yes

Yoke Required No

Minimum Back Box Depth (mm) 25

Ingress Protection IP20

Operational Temperature (°C) -5 to +40

Warranty (Years) 10

Standards BS 5733

## **Additional Information**

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.

Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases as well as anti-viral properties against enveloped and non-enveloped viruses.

Fixing Lugs: Brass

All products have been independently tested with 99.9% of enveloped viruses and 92% of non-enveloped viruses killed off whilst achieving a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.







