


Product Code: CCA053

Description: 13A Fused Connection Unit With Neon & Optional Flex Outlet

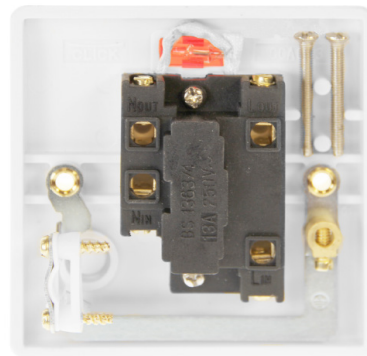

General Information

Plate Dimensions	86mm (W) x 86mm (H) x 9.5mm (D)	
Plate Design & Finish	Rounded Profile Polar White	
Materials	Front Plate & Fuse Drawer: Urea Neon Lens: Polycarbonate Terminal Screws: Steel & Yellow Passivated Earth Strap: Mild Steel	Rear Housing: Nylon Terminals: Brass Internal Busbars: Formed Pressed Brass
Maximum Voltage	250V~ 50Hz	
Load Rating	13A	
Plate Fixing Centres	60.3mm	
Terminal Size	5mmø	
Terminal Torque	2.0Nm	
Terminal Capacity	3 x 2.5mm ² or 2 x 4mm ²	
Switched	No	
Twin Earth Terminals	No	
Neon Indicator	Yes (Red)	
Product Markings	Fused	
Fuse Fitted	13A (BS 1362)	
Flex Outlet	Yes (10mmø Through Front of the Plate)	
Ingress Protection	IP20	
Back Box Depth	25mm Minimum	
Termination Type	Screw	
Operational Temperature	-5°C to +40°C	
Warranty	10 Years	
Standards	BS 1363-4: 2016 +A1: 2018 BS 1362:1973	

Additional Information

Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases as well as anti-viral properties against enveloped and non-enveloped viruses.
All products have been independently tested with 99.9% of enveloped viruses and 92% of non-enveloped viruses killed off whilst achieving a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.