



■ FORK- AND PIN-BUSBARS

Cross section	16 mm ²
FEEDING AT BEGINNING / ENDING	
Max. current I_s /Phase	80 A
Connection cross current	16 mm ²
OTHER FEEDINGS	
Max. feeding current I_s /Phase	120 A
Cross section of connection	35 mm ²

■ FEEDING AT BEGINNING OR END OF BAR

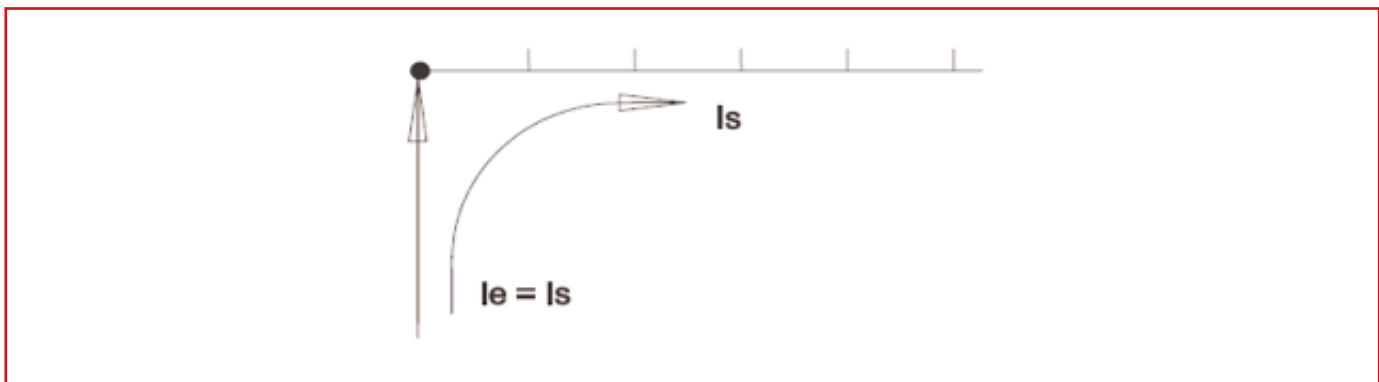

■ OTHER FEEDINGS

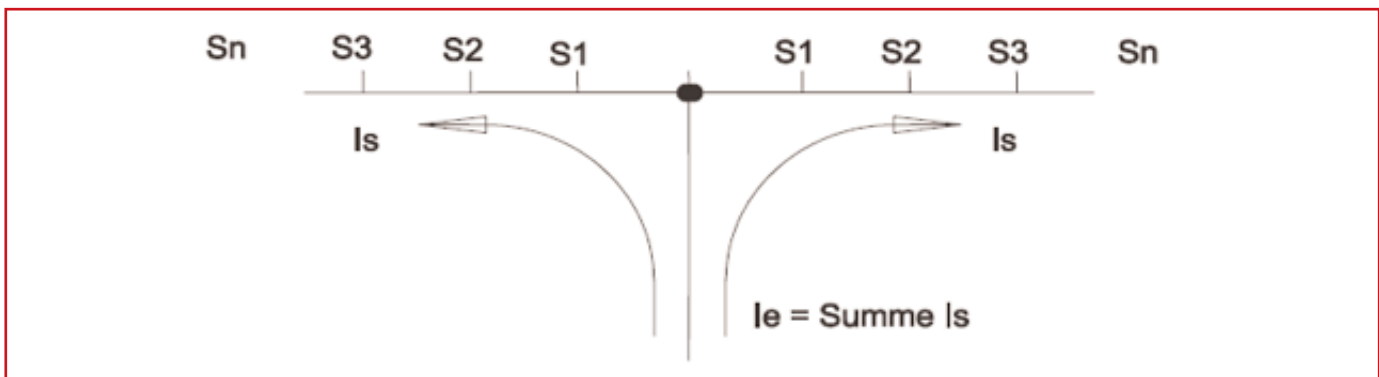

■ NOTE

When shortening the busbars please note, that the copper-bars need to be 10mm shorter than the insulation on both ends. Due to security purposes all shortened busbars need to be covered with suitable endcovers.

DESCRIPTION/CROSS SECTION	SU	PU	ORDER NO.
Fork-Busbar 16 mm ²	56	10	BS900112