
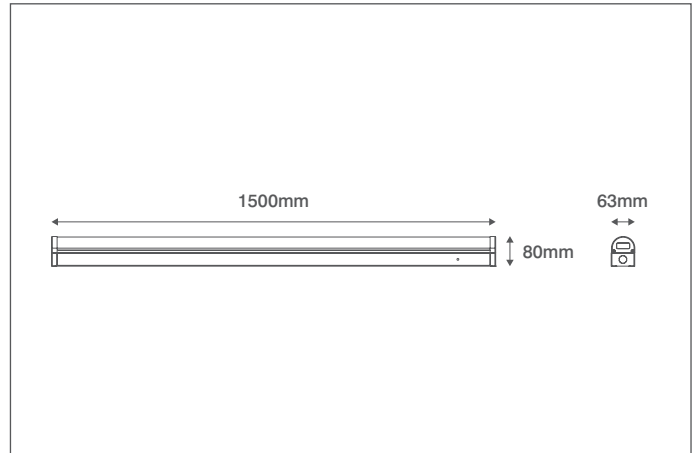


INCEPTOR® B-LITE

Technical Specification

Product Code: OV82150

Description: 42-60W 1500mm Multi-Current Linear LED Batten

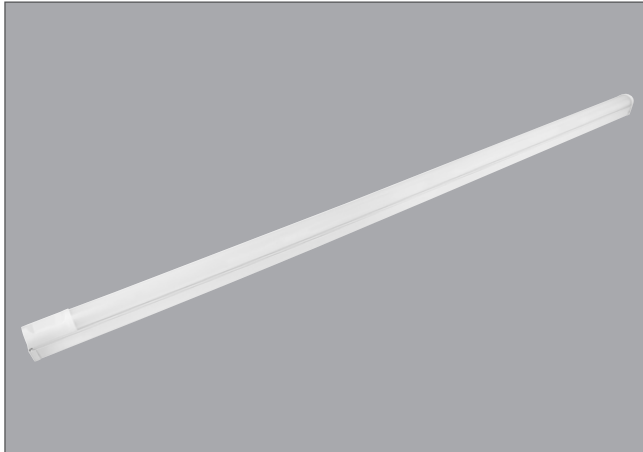

General Information

Dimensions (mm)	1500 (L) x 63 (W) x 80 (D)
Materials	Base: Powdercoated Steel
	Opaque Diffuser: Polycarbonate
Base Finish	White (RAL 9010)
Product Weight (Kg)	1.6
Ingress Protection	IP20
Impact Rating (IK)	08
Mounting	Ceiling or Wall
Warranty (Years)	5

Luminaire Output


LED Wattage	42	48	54	60
Typical Luminous Flux	4410	5040	5670	6300
Efficacy	105	105	105	105
Circuit Wattage	42	48	54	60
Beam Angle (°)	120			
Colour Temperature (K)	4000			
Flicker Free	Yes			
Colour Rendering Index (CRI)	>80			
LED Lifetime (L70)	50,000			

Supply & Power Information


Input Voltage & Frequency (V~ / Hz)	200-240 50
Safety Class	I
Circuit Wattage (W)	42/48/54/60
Input Current (A)	300
Inrush Current	0.3A (<0.5S)
Power Factor	>0.9
Operating Temperature (°C)	-20 to +45
Maximum Critical Temperature (°C)	+80
Input Terminations	3 Pole Push Fit Terminal Block

Dimming Information


Dimmable	No
----------	----




42W



48W



54W

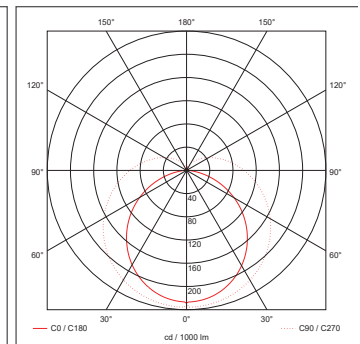

60W



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com